



Espacenet

Bibliographic data: JP 2008022995 (A)

VEIN TESTING DEVICE AND VEIN TESTING METHOD

Publication date: 2008-02-07

Inventor(s): TAMAMURA KAZUKI; YAMAZAKI YUTAKA; YAMADA MOTOHARU; OYAMA NORIO; ODA KATSUSHI +

Applicant(s): FUKUDA DENSHI KK +


Classification:
- international: **A61B5/02; A61B5/026; A61B5/05**
- European:

Application number: JP20060197388 20060719

Priority number(s): JP20060197388 20060719

Abstract of JP 2008022995 (A)

PROBLEM TO BE SOLVED: To improve the reproducibility of a venous blood ejecting action and to improve the reliability of the test result of a venous disease. ; **SOLUTION:** The vein testing device tests the vein by mounting a pair of measurement electrodes 5b on the lower limb of a subject. In the device, a cuff 3 is mounted on the lower limb to pressurize the vein of the lower limb. A pressure adjusting part 8 repetitively elevating and lowering the cuff pressure of the cuff 3 and ejects the venous blood of the lower limb. An impedance conversion part 7 measures the impedance change of the lower limb after venous blood ejection by the pressure adjusting part 8 by the pair of measurement electrodes 5b. ; **COPYRIGHT:** (C)2008,JPO&NPIT

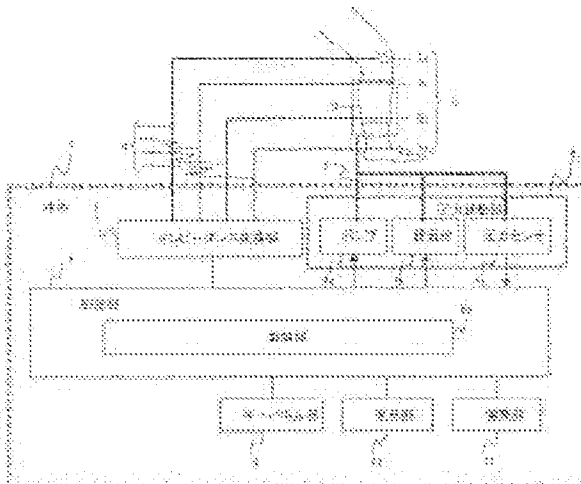

Last updated: 26.04.2011
Worldwide Database 5.7.23.1; 92p